


24" Strip Light Installation

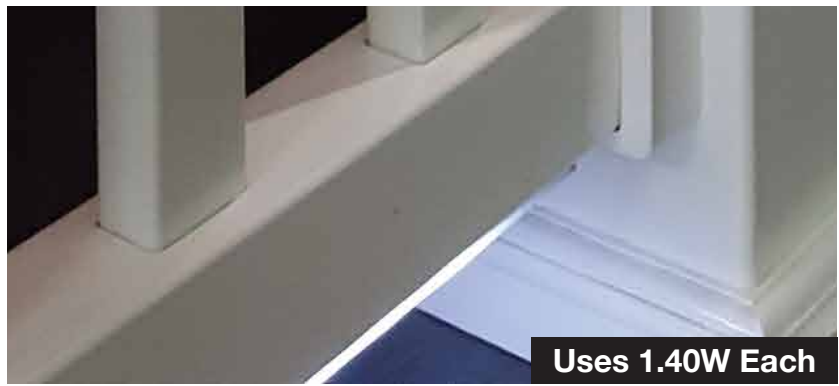

Uses 1.40W Each

LVX2STRIP

Be sure not to exceed the maximum wattage for the transformer used.



1. Placement

The 24" Strip Light is to be installed under the step lip shining down onto the step below.



2. Drill Wire Hole

Using a 5/16" drill bit, drill the hole for the wires through the riser just below where the light will be installed.



3. Feed The Wire

Feed the wire through the riser to connect later.



4. Attach

Using the provided screws, attach the light under the lip/overhang at both ends.



5. Connect

Plug the male end into the female end of the last component installed.



6. Complete

24" Strip Light only has one wire (male end). Use a 2 to 1 splitter if not at the end of the daisy chain.



7. Alternate Support

If you feel the light needs more support, there is a middle bracket included with an extra screw. Attach under the lip before you attach the light. The open side of the bracket needs to be pointing downward.



8. Support

Here you can see where the bracket is attached.